

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 666 085 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
15.03.2000 Bulletin 2000/11

(51) Int Cl.7: **A61M 15/00**

(21) Application number: **95300378.7**

(22) Date of filing: **20.01.1995**

(54) **Powder medicament inhaler**

Vorrichtung zum Inhalieren von Pulverarzneimitteln

Appareil pour inhaler des médicaments sous forme de poudre

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI NL SE

(30) Priority: **02.02.1994 PT 10145094**

(43) Date of publication of application:
09.08.1995 Bulletin 1995/32

(73) Proprietor: **PLURICHEMIE ANSTALT**
9490 Vaduz (LI)

(72) Inventors:
• **Villax, Peter**
P-1200 Lisbon (PT)
• **Peres, Rui**
P-2750 Cascais (PT)

• **Treneman, William Richard**
Oakington, Cambs. CB4 5BA (GB)
• **McDerment, Iain Grierson**
Royston, Herts. SG8 6DB (GB)
• **Bunce, Martin**
Finsbury Park, London N4 2BB (GB)

(74) Representative: **Wain, Christopher Paul et al**
A.A. Thornton & Co.
235 High Holborn
London WC1V 7LE (GB)

(56) References cited:
EP-A- 0 406 893 **FR-A- 2 278 352**
FR-A- 2 352 556 **US-A- 2 992 645**

EP 0 666 085 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to a powered medicament inhaler, and to the use thereof to fluidise powdered medicament.

[0002] Pressurized inhalers for administering a metered dose of powdered medicament have long been known, but their use of chlorofluorocarbons as propellants is environmentally undesirable, and there is currently a renewed interest in breath-actuated powder inhalation devices.

[0003] There are many known devices for the self-administration of a powdered medicament by inhalation. These devices comprise an inhalation tube through which the patient inhales into his mouth or nose, and means for releasing a dose of powder into the air stream so that it is carried in the air stream through the mouth and throat into the lungs. Some devices contain a store of powder and are arranged to release a metered dose each time the device is used. Others utilise frangible capsules which contain a unit dose of medicament. These devices usually also comprise some means for puncturing or breaking the capsule to release the contents. Examples of capsule-using devices are shown in GB-A-1561835, US-A-4889114 and US-A-3991761.

[0004] In FR-A-2278352 there is described a dispenser for powders comprising a tubular body having a downstream end for a person to draw air therethrough and an upstream end. Two diametrically opposed radial passages are provided in the tubular body for admitting a flow of air in response to the suction of a person inhaling through the downstream end of the tubular body. A capsule containing a powdered medicament is fixedly disposed in the tubular body between the upstream and downstream ends. The capsule includes at least one air entry hole and at least one air exit hole for drawing a second flow of air through the tubular body in response to the suction of a person inhaling through the downstream end of the tubular body.

[0005] Some capsule using devices have a low resistance to airflow and, as a result, during operation the powder tends to be administered too quickly and all at once. With the airflow saturated with powder, a considerable quantity of the powder can impinge in the mouth and throat, where it serves no beneficial therapeutic effect; indeed, the chief objective of the device, from the therapeutical aspect, is the maximization of the quantity of powder that reaches the lungs, a concern which until recently had remained secondary.

[0006] Whilst many known powder devices have proved reasonably satisfactory in practice, they all have the disadvantage that the user has no simple means of knowing, during use, whether the full dose of medicament has actually been administered. Thus, in the commercially available known devices, the powder dose to be administered is hidden within the device so that at the time of inhalation the user cannot be certain that it has all been released and inhaled. Furthermore, in

some known devices there is a visible build-up over a period of use of a powder deposit in the device, requiring frequent cleaning. A further disadvantage of some known powder devices is their mechanical complexity, resulting in an increased production cost and difficult assembly.

[0007] We have devised a method for fluidising a powdered medicament for inhalation and an inhalation device, which can be simple to operate and therapeutically efficient, and in a preferred embodiment, can give the user clear evidence of effective release of capsule contents during the inhalation process.

[0008] According to one aspect of the present invention, there is provided a powdered medicament inhaler, comprising: an inhalation tube having a first, downstream end for a person to draw air therethrough and a second, upstream end; an air inlet in the inhalation tube for admitting a first flow of air in response to the suction of a person inhaling through the first end of the inhalation tube; a medicament chamber, for holding a quantity of medicament in the form of a powder, the medicament chamber being disposed in the inhalation tube upstream of the first end; wherein the medicament chamber includes at least one air entry hole and at least one air exit hole for drawing a second flow of air through said medicament chamber in response to the suction of a person inhaling through the first end of the inhalation tube, characterised in that: the area of the air inlet, the area of the air entry hole or holes and the area of the air exit hole or holes are configured such that, when air is drawn through the inhaler, the first flow of air is greater than the second flow of air; and the area of the air entry hole or holes is smaller than the area of the air exit hole or holes, such that powder inside the medicament holder fluidises when air is drawn through the capsule from the air inlet hole or holes to the air exit hole or holes.

[0009] We have found that this simple construction can give excellent fluidisation of powder inside the chamber and excellent flow of powder directly through the tube, mouth and throat into the lungs. We have also found that this fluidisation is important to provoke the dispersion of powder agglomerates into the desired fine particles. Furthermore, by careful selection and control of the airflow permitted through the chamber, the device can be tuned to suit different users and/or different medicaments.

[0010] The chamber for containing the powdered medicament can, for example, be constructed integrally with the tube, or it may be a separate unit receivable or connectable to the tube. The chamber can include a dose providing means for supplying a unit dose of medicament to the chamber ready for inhalation. Alternatively, and in accordance with a preferred aspect of this invention, the chamber comprises a capsule which may be conventional apart from the provision therein of holes for the air flow therethrough. The invention will hereafter be described mainly with reference to its use of a capsule chamber but it is to be understood that the invention

is not limited to the use of a capsule.

[0011] In use of an inhaler of the invention, air is drawn through the capsule or other chamber to fluidise ("aerosolise") the powder therein. The air entry holes in the chamber should be of a size small enough to severely restrict the admission of air into the chamber, when compared to the main airflow created by the user inhaling through the device. This causes a low pressure area inside the chamber in front of the air entry holes, causing the powder to move at first toward that area, from which it is then fluidised and transported in the opposite direction, toward the air exit holes and into the tube. The aerosol so generated is then diluted by admission of air into the inhalation tube, downstream of the chamber via one or more air inlets, so assisting the delivery of the powder to the lungs.

[0012] In a very simple and elementary form, the inhalation tube comprises a simple tube one end of which is receivable in the user's mouth (or nostril) and the other end of which is sized to receive in friction fit a gelatin or plastic capsule containing the medicament.

[0013] The air inlet is disposed between the capsule and the mouth end of the tube. The capsule has the air entry hole or holes at its outer end, and air exit hole or holes at its inner end to release the powder into the inhalation tube during use of the device. The capsule can be visible during use of the device so that the user can see the aerosolisation of the powder therein and be assured as to its substantially complete emptying into the inhalation tube.

[0014] It will be appreciated that, unlike certain prior devices where powder capsules have been used, the capsule in the present invention is neither made to rotate, to vibrate or to be twisted open. Here, the only movement present is that of the powder within the capsule, which passes through the inhalation tube to the lungs.

[0015] The inhalation tube is provided with one or more air inlets to provide a supply of air into the tube downstream of the chamber. We prefer to provide such inlets close to the end of the chamber. In one construction, the inlet(s) can be around the periphery of the chamber but more usually they will be slightly spaced downstream of the chamber. The size of the air inlet(s) will depend on the overall construction of the device as will be more fully described hereafter.

[0016] The inhalation tube itself can be, for example, a straw or the like, or it can be a flexible or rigid plastics or other tube. It can be disposable (for once-only use) or it can be made for continued use, the used capsule shell (or other chamber) being removed after each use. The nature of the tube is not critical except for the provision of the air inlet(s) and for the provision of a structure capable of having the medicament chamber fixed thereto.

[0017] The inhalation tube is arranged so that, when a capsule is located therein, the through-bore of the inhalation tube is blocked by the capsule. The seal need

not be perfect and, indeed, in one arrangement described an air inlet passage is provided between the periphery of the capsule and the tube. However, generally the capsule will be a tight friction fit in the bore of the tube to substantially occlude it. In this way, during use of the device, most of the inhaled air is supplied by the air inlet(s) with only a small quantity being admitted through the capsule holes. In a simple arrangement, the medicament chamber may be received in an appropriately dimensioned inside end of the inhalation tube. In other more complex arrangements, the medicament chamber may be received in a separate unit attachable to the inhalation tube as desired.

[0018] In one particular aspect of the invention, the powdered medicament inhaler of the present invention is for use with standard (or specially made) conventional-type capsules containing unit doses of medicament, and the invention will hereafter be so described. As stated previously, it is possible, however, to use other forms of chamber for housing unit doses of medicament to achieve essentially the same effect as with the capsules.

[0019] The capsules for use in the inhalers of the invention must be punctured before use so as to allow an air flow therethrough. To achieve this, one or more holes are formed in the capsules. In a preferred arrangement, the holes are formed at each of the ends of the capsule, but other arrangements are possible. When the capsule is located in the inhalation tube the air exit hole or holes open into the inhalation tube and the air entry hole or holes open to an air supply. We have observed that small air entry holes, of a diameter of less than 1 mm, provide for the best swirl of product inside the capsule. With less restricted air entry holes, the powder may exit the capsule in too short a time to be properly diluted by the air entering through the tube inlets, or may even fail completely to be suspended as an aerosol. The exit and entry holes may be of the same or different sizes, and there may be the same or different numbers of each. In general, we prefer that the total area of the exit holes be from 50% greater than to three times greater than the total area of the entry holes. However, the optimum arrangement can be determined by routine trial and experiment. Instead of using capsules which have different puncture areas at each end, it is possible to use capsules equally punctured at each end, but to restrict air supply to the air entry holes of the capsule through the use of a similarly pierced cover or cap fitted over the air entry side of the capsule.

[0020] The passage of air through the punctured capsule fluidises the powder therein, and causes it to be finely suspended. The turbulence is visible through the clear wall of the capsule, and the user simply inhales for as long as powder is visible in the capsule. Because of the restricted admission of air into the capsule, and resulting limited supply out of it, the delivery of powder from the capsule can be kept desirably slow. The slowness of the emptying of the powder is a highly desirable

feature of this device, as it permits to match the time it takes to empty the capsule with the time it takes to fill the user's lungs. This causes the powder to be finely dispersed and transported by air flow, reducing the quantity of powder becoming stuck in the user's mouth or throat, and increasing the proportion which reaches the lungs.

[0021] In general, most of the air inhaled will enter the inhalation tube via the air inlet(s) therein, the proportion reaching 80%, or more in certain cases. The remainder comes through the capsule and, in so doing, entrains the powder therein. In any particular case, routine trial and experiment will reveal the optimum arrangement for air flows, to achieve the desired effects. One feature which can be achieved in the devices of the invention is a level of resistance to air flow which makes the device comfortable for the user by reducing the effort required to empty the capsule.

[0022] The role of air passages in the device is important. In the following description, the capsule holes are assumed to have all the same diameter, so that a variation in the number of holes results in a proportionate and measurable change in their total surface area.

[0023] We have found that by having fewer entry holes than exit holes in the capsule, it is possible to slow down the rate at which the powder is drawn out of the capsule. All other things being equal, the fewer the number of air entry holes in the capsule, the slower the release of the powder into the tube and thence through the mouth and into the lungs.

[0024] Conversely, by having air inlet(s) on the tube, the total surface area of which can be, for example, 2 to 12 times that of the capsule air entry holes, it is possible to regulate the resistance of the device to the passage of air. All other things being equal, the greater the area of the air inlet(s) on the tube, the greater the quantity of air entering the tube and the greater its powder entrainment capability.

[0025] We have also found that by varying the number and combination of air entry and exit holes on the capsule, it is possible to regulate the operation of the device, filled with powders of different particle sizes. Generally, powders with a smaller particle size will require a smaller total area of entry and exit air holes, than powders with a greater particle size, to achieve the same emptying of the capsule in the same period of time.

[0026] Consequently, by experimentally varying the surface area and number of air passages, different embodiments of this invention can be optimized to suit the needs of users with different inhalation abilities, such as children, adults or the elderly, as well as the requirements of powder with different particle sizes and aerodynamic properties.

[0027] Thus the existence of various inlets and holes provides for different conditions throughout the device. Within the capsule, the restricted admission of air causes a low pressure area and high air resistance, leading to a fluidisation of the powder, finely suspending it. In

the tube, the low air resistance caused by more air being drawn through the air inlets results in a more comfortable use to the patient as well as a high powder entrainment capacity. The embodiment of this invention combines the benefits of both low air resistance overall and high air resistance in the capsule, with none of their respective disadvantages.

[0028] The provision of holes in the capsules to enable the airflow therethrough can be effected in any suitable way. For examples, needles can be used to form the holes, but we prefer to puncture the capsules with the cutting edge such as a knife blade. In this way, the risk of the puncturing action producing gelatine debris is reduced and control of the size of the cuts enables the airflow to be controlled. Furthermore, we have found that spillage of the powder contents from the capsule can be practically nil when the holes are formed by cutting whereas powder loss can sometimes occur when holes are formed using needles. We have referred above to the use of small entry holes of less than 1 mm. Holes produced by cutting are of an oblong shape, with the cut having a width at its widest point of typically 0.5 mm and a length of 3 to 5 mm.

[0029] The device of the invention can include a means for puncturing the pre-filled capsules, and this may form an integral part of the device or it may be a separate unit. Known such devices normally comprise one or more needles arranged to pierce the capsule. A preferred device for use in the present invention would provide a larger area of puncture in one region of the capsule than in another region. Where, in accordance with a preferred feature of the invention, the holes are formed by cutting, cutting blades can be provided to form cuts in, for example, each end of the capsule as desired. In one preferred arrangement, the chamber is received in a barrel member including an elongate container for housing a single capsule, and knife members are provided to form cuts in each end of the capsule by relative movement between the capsule and the blades.

[0030] Alternatively, holes can be pre-formed in the capsules, the holes being temporarily covered to prevent premature loss of powder therefrom. When it is desired to use a capsule, the temporary cover (e.g. adhesive film) can be removed. In one particular embodiment, a capsule (or capsule-like chamber) is provided at one end of an inhalation tube, the outer holes of the capsule being temporarily covered with peelable film and the inner holes also temporarily covered. Then, immediately prior to use, the covers are removed.

[0031] In the preferred devices of the invention, where a capsule containing a unit dose is used, there is no shaking or vibration required to empty the contents. This contrasts with many prior art devices. In the present invention, the powder is removed by the unique air flow arrangements in the device. In operation the powder contents of a capsule form a "dancing cloud" as they are air-borne. The capsule itself remains substantially motionless during inhalation.

[0032] In order that the invention may be more fully understood, reference is made to the accompanying drawings, wherein:

Fig. 1 is a longitudinal section of a first embodiment of device of the invention;

Fig. 2 is a longitudinal section of a second embodiment of device of the invention;

Fig. 3 is a longitudinal section of a third embodiment of device of the invention;

Fig. 4 is a front elevation of an embodiment of capsule;

Fig. 5 is a rear elevation of the capsule of Fig. 4.

Fig. 6 is a side elevation of a fourth embodiment of a device of the invention;

Fig. 7 is an "exploded" view of the components of the device of figure 6 (also with a cap);

Fig. 8 is a detail section along the axis of bore 120, showing a capsule positioned in the device of Fig. 7, ready for inhalation.

[0033] Referring to the drawings, in which like numerals indicate like parts, there is shown an inhalation tube 1, having an end 2 to be received in the user's mouth, and a remote end 3.

[0034] In Fig. 1, a gelatin capsule 4 is snugly fitting and held in remote end 3 of tube 1. Near the inner end 5 of capsule 4 are two air-inlet orifices 6 in the tube 1.

[0035] Capsule 4 is a conventional capsule of two parts with rounded ends 5 and 5a. Outer end 5a has two holes 7 therein and inner end 5 has four holes 8 therein - (see also Figs. 4 and 5). The holes are the same size (although they need not be). For a standard no. 4 capsule (14 mm x 5mm), the hole size can be 0.65mm diameter for example. The capsule 4 contains a dose (9) of medicament, either pure or mixed in a carrier powder. The powder should preferably not fill more than about 10% of the volume of the capsule, to provide adequate space for aerosolisation of the powder during use.

[0036] Fig. 2 differs from Fig. 1 in that a cover 20 is provided over the outer end 5a of capsule 4, which end may have the same number of holes 10 therein as inner end 5. Cover 20 has a restricted air orifice 21.

[0037] Fig. 3 differs from Fig. 1 in that air inlets 6 have been omitted and, instead, inner radial fins 30 are provided at end 3 of tube 1 to hold the capsule 4 spaced from the inner wall of the tube and so provide air inlet passages between the periphery of the capsule 4 and the tube 1.

[0038] Figs. 6 to 8 illustrate a fourth embodiment of inhaler of the invention. In these Figs., like numerals indicate like parts.

[0039] Fig. 6 shows the inhaler 70 comprising a capsule reservoir cap 71, a rotatable barrel member 72 and mouthpiece member 73. Mouthpiece member 73 includes a capsule ejection orifice 74 and an inhalation orifice 75. Barrel member 72 includes a series of external ribs 76 for improved manual grip.

[0040] Fig. 7 is an "exploded" view of the inhaler of Fig. 6 showing its components. Capsule reservoir cap 71 comprises a cylindrical cap member closed at one end 80, the other end 81 being open and containing internally thereof short screw-threads 82. Reservoir support body 83 is of circular cross-section and includes a series of short screw-threads 84 on the periphery thereof for mating engagement with threads 82 on reservoir cap 71. Support body 83 is formed on its forward face 89 with an axial hole 85 keyed to receive one end of axle 86. Offset from axial hole 85 is a through-bore 87 opening in an upstanding cylindrical sleeve on rear face 90. Receivable in sleeve 88 is a cylinder 91 having a supply of capsules 92, stacked endwise.

[0041] Support member 83 also has two other upstanding cylindrical sleeves 93, 94 on its rear face 90, which receive and close the ends of spare capsule supply cylinders 95, 96. Mounted on front face 89 of support 83 is a cutting blade 97 projecting perpendicular to the face 89. Also on face 89 is an ejector ramp projection 150.

[0042] Barrel member 72 has an axial bore 100 in which is received axle 86 about which barrel member 72 is rotatable. Barrel 72 has an offset through-bore 101 which constitutes a container for receiving a capsule in use of the device. Around the periphery of cylindrical barrel 72 are external ribs 76. Each end face 102, 103 of the barrel has a peripheral upstanding wall 104, 105 of a height slightly greater than the projecting length of blades 97, 110 so that the blades do not engage the respective end faces 102, 103 of the barrel member.

[0043] Blade support member 111 is of a circular shape and has an axial bore keyed to one end of the axle 86. The member 111 has a first through bore 112 and a second through bore 113. Projecting from member 111 towards barrel member 72 is a knife 110. Member 111 has two air inlets (not shown in Fig. 7; see Fig. 8), which are straight bores perpendicular to the axis of first through bore 112.

[0044] Mouthpiece 73 is joined face to face to support member 111. Mouthpiece 73 has a first through bore 120 which constitutes an inhalation tube terminating at inhalation orifice 75 and a second through bore 121 which is a used capsule ejection bore, and terminates at capsule ejection orifice 74.

[0045] A cap 130 can be provided to cover the mouthpiece 73 when the device is not in use, the cap including a pocket clip 131.

[0046] The assembly and operation of the device are as follows. Cylinder 91 containing a supply of powder containing capsules 92 is located in sleeve 88 and a capsule moves under gravity into bore 87 of body 83. Barrel 72 is rotated with respect to supports 83 and 111, about axle 86, to bring bore 101 into line with bore 87. The capsule enters and is fully received into the barrel member. The capsule is slightly longer than the distance between the end faces 102, 103 of the barrel member, as a result of which the opposed ends of the capsule

project beyond the said end faces 102, 103.

[0047] The barrel has a ratchet (or other device) associated therewith whereby it can be rotated about axle 86 in one direction only and in stepwise motion. The ratchet is not shown. The barrel is now rotated and this brings each projecting end of the capsule, in turn, into engagement with a respective knife member 97, 110. The ends of the capsule are thus slit (see slits 140, 141 in Fig. 8).

[0048] The barrel is now advanced further, to bring the capsule into alignment with bore 112 of support 111. The unit is now ready for inhalation. The user inserts the end of the mouthpiece 73 into their mouth and inhales. Air is drawn through inhalation tube 120 and bore 112 and thus through bore 101 in barrel 72. The suction draws the capsule forward to enter bore 112 and engage closely the end of bore 120 (see Fig. 8). To facilitate seating of the end of the capsule in bore 120, the end of the bore can be flared at 142 (Fig. 8).

[0049] The air flowing through the mouthpiece enters the device primarily through the path of least resistance, which is through air inlets 143 but also, in a smaller amount, through the slits in the capsule. Thus air is drawn through the capsule entering at slit 140 and exiting with the entrained powder at slit 141, for passage via bore 112, where a considerable amount of air is admitted through inlets 143. The air flow entraining the powder now enters bore 120 of the mouthpiece for passage into the user's mouth. As barrel 72 is transparent, the user can repeat the inhalation operation for as long as powder remains visible inside the capsule.

[0050] Finally, after the contents of the capsule have been inhaled and the suction has stopped, the empty capsule falls away from the flared end of bore 120 into the barrel bore 101. The barrel then continues to be rotated in the same direction as before to bring the capsule, still in bore 101 into line with the ejection bore 113. Simultaneously, the rearward end of the capsule is engaged by ejector ramp projection 150 which pushes the spent capsule out of ejection orifice 74. Barrel 72 is now rotated to bring the empty bore 101 into registry with bore 87 to receive another capsule from reservoir cylinder 91. When cylinder is empty, cap 71 is removed and tube 91 is replaced by one of cylinders 95, 96.

[0051] The device in Fig. 7 relies on gravity for loading and ejecting capsules; therefore these operations have to be conducted with the device held close to the vertical. The operations of cutting the capsule and inhaling it can be done with the device held in any position.

Claims

1. A powdered medicament inhaler, comprising: an inhalation tube (1) having a first, downstream end (2) for a person to draw air therethrough and a second, upstream end (3); an air inlet (6) in the inhalation tube (1) for admitting a first flow of air in response

to the suction of a person inhaling through the first end (2) of the inhalation tube (1); a medicament chamber (4), for holding a quantity of medicament in the form of a powder (9), the medicament chamber (4) being disposed in the inhalation tube (1) upstream of the first end (2); wherein the medicament chamber (4) includes at least one air entry hole (7) and at least one air exit hole (8) for drawing a second flow of air through said medicament chamber (4) in response to the suction of a person inhaling through the first end (2) of the inhalation tube (1), characterised in that: the area of the air inlet (6), the area of the air entry hole or holes (7) and the area of the air exit hole or holes (8) are configured such that, when air is drawn through the inhaler, the first flow of air is greater than the second flow of air; and the area of the air entry hole or holes (7) is smaller than the area of the air exit hole or holes (8), such that powder inside the medicament chamber (4) fluidises when air is drawn therethrough from the air entry hole or holes (7) to the air exit hole or holes (8).

2. An inhaler according to claim 1, wherein said medicament chamber (4) is defined in said inhalation tube (1) adjacent said second end (3).
3. An inhaler according to claim 1 or 2, wherein said medicament chamber (4) comprises a capsule (4).
4. An inhaler according to claim 3, wherein there is more than one air entry hole (7) and there is more than one air exit hole (8).
5. An inhaler according to claim 3 or 4, wherein second end (3) of the inhalation tube (1) is internally dimensioned to receive the capsule (4) in close friction fit.
6. An inhaler according to claim 3, 4 or 5, which further comprises a reservoir (91) for containing a supply of said capsules (4), and means for supplying a capsule (4) from said reservoir (91) to said inhalation tube (1).
7. An inhaler according to claim 6, wherein one end of the capsule (4) is located in close contact with the second end (3) of the inhalation tube (1) by the force of the suction of the person inhaling through the tube (1).
8. An inhaler according to claim 6 or 7, which further comprises a knife means (110) and means for moving said capsule (4) relative to said knife means (110) to form the or each air entry hole (7) and the or each air exit hole (8) in said capsule (4).
9. An inhaler according to any preceding claim, wherein, during use, the movement of the powder (9) in the capsule (4) is visible to the user through the cap-

sule wall.

10. An inhaler according to any preceding claim, wherein the total area of said air inlet (6), said air entry hole or holes (7) and said air exit hole or holes (8) is configured such that, when air is drawn through the inhaler, said first flow of air comprises at least 80% of the total flow of air passing through the inhaler.
11. An inhaler according to any preceding claim, wherein the area of the air inlet (6) is 2 to 12 times the area of the air entry hole or holes (7).
12. An inhaler according to any preceding claim, wherein the area of the air exit hole or holes (7) is 1.5 to 3.0 times greater than the area of the air entry hole or holes (8).

Patentansprüche

1. Pulvermedikamenteninhalator, umfassend: eine Inhalationsröhre (1) mit einem ersten hinteren Ende (2), durch das eine Person Luft zieht, und einem zweiten vorderen Ende (3); einen Lufteingang (6) in der Inhalationsröhre (1), um einen ersten Luftstrom als Reaktion auf das Ansaugen durch eine Person einzulassen, die durch das erste Ende (2) der Inhalationsröhre (1) inhaliert; eine Medikamentenkammer (4) für die Aufbewahrung einer Medikamentenmenge in der Form eines Pulvers (9), wobei sich die Medikamentenkammer (4) in der Inhalationsröhre (1) vor dem ersten Ende (2) befindet; wobei die Medikamentenkammer (4) wenigstens ein Lufteintrittsloch (7) und wenigstens ein Luftaustrittsloch (8) beinhaltet, um einen zweiten Luftstrom durch die genannte Medikamentenkammer (4) als Reaktion auf das Ansaugen durch eine Person zu ziehen, die durch das erste Ende (2) der Inhalationsröhre (1) inhaliert, dadurch gekennzeichnet, daß der Bereich des Lufteingangs (6), der Bereich des Lufteintrittslochs bzw. der Lufteintrittslöcher (7) und der Bereich des Luftaustrittslochs bzw. der Luftaustrittslöcher (8) so konfiguriert sind, daß, wenn Luft durch den Inhalator gezogen wird, der erste Luftstrom größer ist als der zweite Luftstrom; und der Bereich des Lufteintrittslochs bzw. der Lufteintrittslöcher (7) kleiner ist als der Bereich des Luftaustrittslochs bzw. der Luftaustrittslöcher (8), so daß Pulver in der Medikamentenkammer (4) fluidisiert, wenn Luft von dem Lufteintrittsloch bzw. den Lufteintrittslöchern (7) zu dem Luftaustrittsloch bzw. den Luftaustrittslöchern (8) durchgezogen wird.
2. Inhalator nach Anspruch 1, bei dem die genannte Medikamentenkammer (4) in der genannten Inhalationsröhre (1) neben dem genannten zweiten En-

de (3) definiert ist.

3. Inhalator nach Anspruch 1 oder 2, bei dem die genannte Medikamentenkammer (4) eine Kapsel (4) umfaßt.
4. Inhalator nach Anspruch 3, bei dem mehr als ein Lufteintrittsloch (7) und mehr als ein Luftaustrittsloch (8) vorhanden sind.
5. Inhalator nach Anspruch 3 oder 4, bei dem das zweite Ende (3) der Inhalationsröhre (1) innen so bemessen ist, daß es die Kapsel (4) in engem Reibungssitz aufnimmt.
6. Inhalator nach Anspruch 3, 4 oder 5, der ferner ein Reservoir (91) für die Aufnahme eines Vorrats der genannten Kapseln (4) und ein Mittel zum Zuführen einer Kapsel (4) von dem genannten Reservoir (91) zu der genannten Inhalationsröhre (1) umfaßt.
7. Inhalator nach Anspruch 6, bei dem sich ein Ende der Kapsel (4) durch die Saugkraft der durch die Röhre (1) inhalierenden Person im engen Kontakt mit dem zweiten Ende (3) der Inhalationsröhre (1) befindet.
8. Inhalator nach Anspruch 6 oder 7, der ferner ein Messer (110) und ein Mittel zum Bewegen der genannten Kapsel (4) relativ zu dem genannten Messer (110) umfaßt, um das oder jedes Lufteintrittsloch (7) und das oder jedes Luftaustrittsloch (8) in der genannten Kapsel (4) zu bilden.
9. Inhalator nach einem der vorherigen Ansprüche, bei dem die Bewegung des Pulvers (9) in der Kapsel (4) während des Gebrauchs für den Benutzer durch die Kapselwand sichtbar ist.
10. Inhalator nach einem der vorherigen Ansprüche, bei dem der Gesamtbereich des genannten Lufteingangs (6), des/der genannten Lufteintrittslochs bzw. -löcher (7) und des/der genannten Luftaustrittslochs bzw. -löcher (8) so konfiguriert ist, daß, wenn Luft durch den Inhalator gezogen wird, der genannte erste Luftstrom wenigstens 80% des gesamten Luftstroms durch den Inhalator ausmacht.
11. Inhalator nach einem der vorherigen Ansprüche, bei dem der Bereich des Lufteingangs (6) das 2 bis 12fache des Bereichs des/der Lufteintrittslochs bzw. -löcher (7) beträgt.
12. Inhalator nach einem der vorherigen Ansprüche, bei dem der Bereich des/der Luftaustrittslochs bzw. -löcher (7) 1,5 bis 3,0 mal größer ist als der Bereich des/der Lufteintrittslochs bzw. -löcher (8).

Revendications

1. Un appareil pour inhaler des médicaments sous forme de poudre, englobant : un tube d'inhalation (1) ayant une première extrémité aval (2) pour permettre à une personne d'attirer de l'air à travers, et une seconde extrémité amont (3) ; une admission d'air (6) dans le tube d'inhalation (1) pour admettre un premier débit d'air en réponse à l'aspiration d'une personne inhalant à travers la première extrémité (2) du tube d'inhalation (1) ; une chambre à médicament (4) pour conserver une quantité de médicament sous forme d'une poudre (9), la chambre à médicament (4) étant disposée dans le tube d'inhalation (1) en amont de la première extrémité (2) ; dans lequel la chambre à médicament (4) comporte au moins un trou d'entrée d'air (7) et au moins un trou de sortie d'air (8) pour prélever un second débit d'air à travers ladite chambre à médicament (4) en réponse à l'aspiration d'une personne qui inhale à travers la première extrémité (2) du tube d'inhalation (1), caractérisé en ce que : la superficie de l'admission d'air (6), la superficie du trou ou des trous d'entrée d'air (7) et la superficie du trou ou des trous de sortie d'air (8) sont configurées de façon telle que, lorsque de l'air est attiré à travers l'inhalateur, le premier débit d'air est plus grand que le second débit d'air ; et la superficie du trou ou des trous d'entrée d'air (7) est plus petite que la superficie du trou ou des trous de sortie d'air (8), de façon telle que la poudre qui se trouve à l'intérieur de la chambre à médicament (4) se fluidifie lorsque de l'air est attiré à travers elle depuis le trou ou les trous d'entrée d'air (7) vers le trou ou les trous de sortie d'air (8).
2. Un inhalateur selon la revendication 1, dans lequel ladite chambre à médicament (4) est délimitée dans ledit tube d'inhalation (1) adjacent à ladite seconde extrémité (3).
3. Un inhalateur selon la revendication 1 ou 2, dans lequel ladite chambre à médicament (4) se compose d'une capsule (4).
4. Un inhalateur selon la revendication 3, dans lequel il existe plus d'un trou d'entrée d'air (7) et plus d'un trou de sortie d'air (8).
5. Un inhalateur selon la revendication 3 ou 4, dans lequel ladite seconde extrémité (3) du tube d'inhalation (1) est dimensionnée intérieurement pour recevoir la capsule (4) en ajustement serré.
6. Un inhalateur selon la revendication 3, 4 ou 5, qui englobe de plus un réservoir (91) pour contenir une charge desdites capsules (4), et des moyens de fourniture d'une capsule (4) depuis ledit réservoir (91) vers ledit tube d'inhalation (1).
7. Un inhalateur selon la revendication 6, dans lequel une extrémité de la capsule (4) est placée en étroit contact avec la seconde extrémité (3) du tube d'inhalation (1) par la force de l'aspiration de la personne qui inhale à travers le tube (1).
8. Un inhalateur selon la revendication 6 ou 7, qui englobe de plus une lame (110) et un moyen de déplacement de ladite capsule (4) relativement à ladite lame (110) pour former le trou d'entrée d'air ou chaque trou d'entrée d'air (7) et le trou de sortie d'air ou chaque trou de sortie d'air (8) dans ladite capsule (4).
9. Un inhalateur selon l'une quelconque des revendications précédentes dans lequel, pendant l'emploi, le mouvement de la poudre (9) dans la capsule (4) est vu par l'utilisateur à travers la paroi de la capsule.
10. Un inhalateur selon l'une quelconque des revendications précédentes, dans lequel la superficie totale de ladite admission d'air (6), dudit/desdits trou(s) d'entrée (7) et dudit/desdits trou(s) de sortie d'air (8) est configurée de façon telle que, lorsque de l'air est aspiré à travers l'inhalateur, ledit premier débit d'air englobe au moins 80% du débit d'air total qui traverse l'inhalateur.
11. Un inhalateur selon l'une quelconque des revendications précédentes, dans lequel la superficie de l'admission d'air (6) est 2 à 12 fois plus grande que la superficie du trou ou des trous d'entrée d'air (7).
12. Un inhalateur selon l'une quelconque des revendications précédentes, dans lequel la superficie du trou ou des trous de sortie d'air (7) est de 1,5 à 3,0 fois plus grande que la superficie du trou ou des trous d'entrée d'air (8).

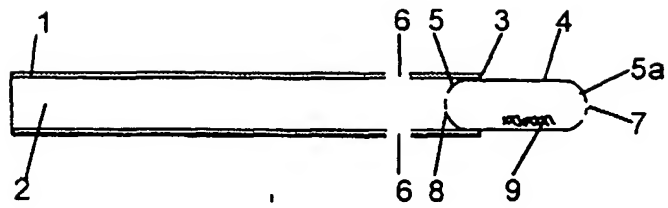


Fig. 1

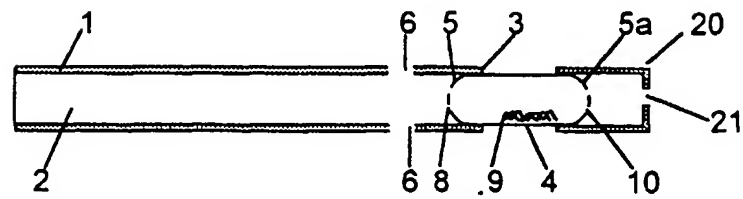


Fig. 2

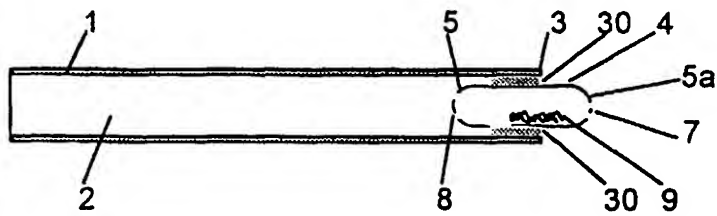


Fig. 3




Fig. 4




Fig. 5

BEST AVAILABLE COPY

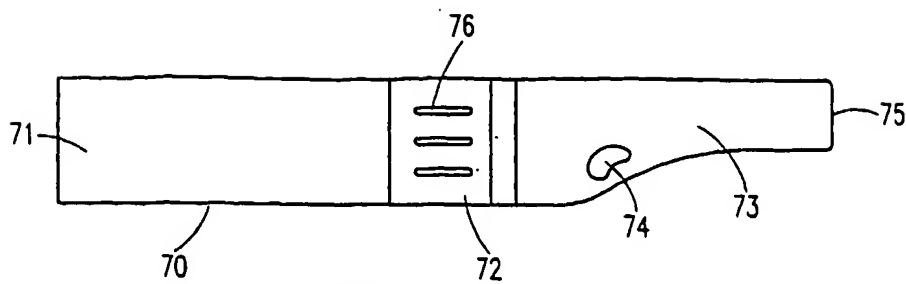


FIG. 6

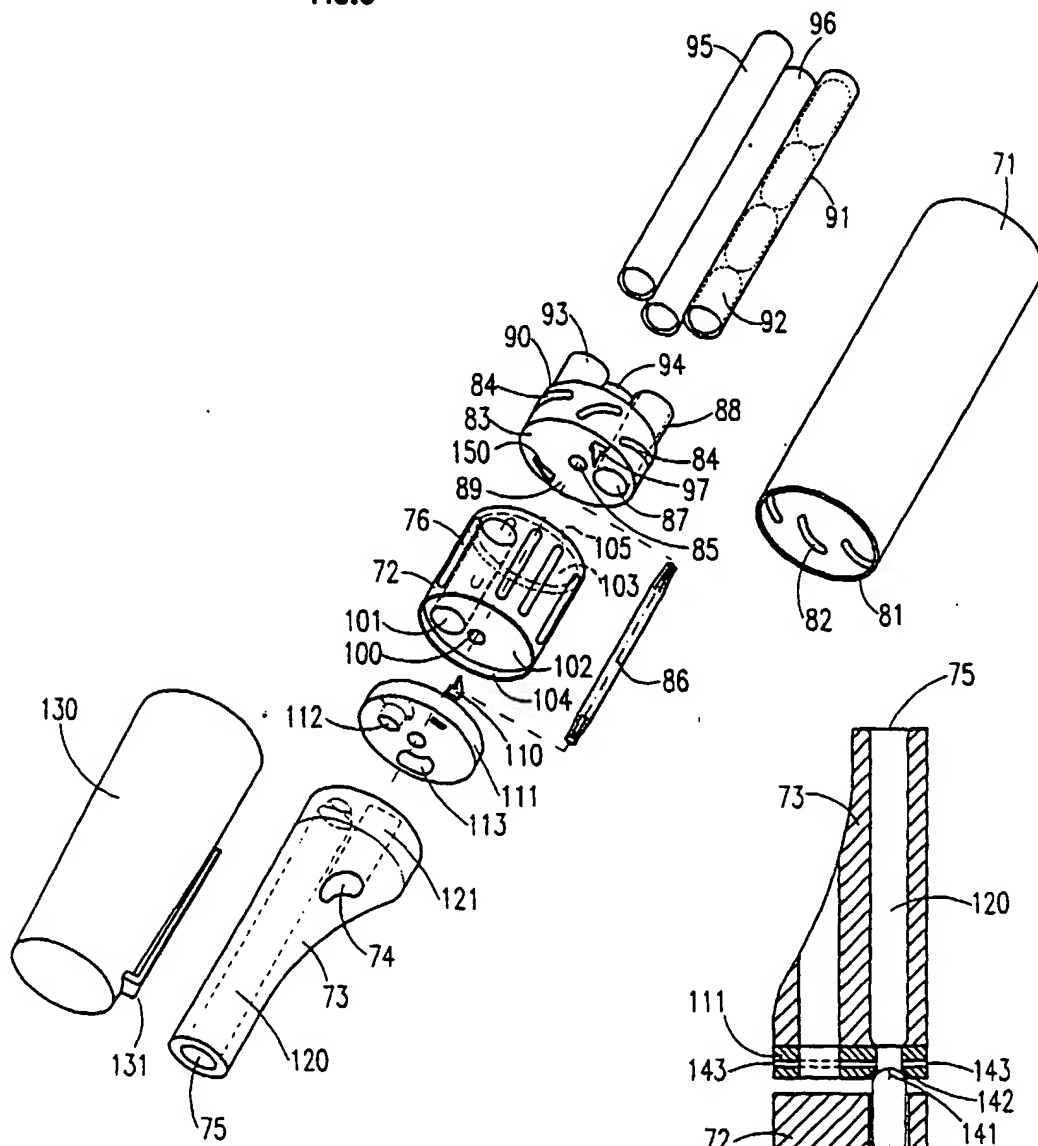


FIG. 7

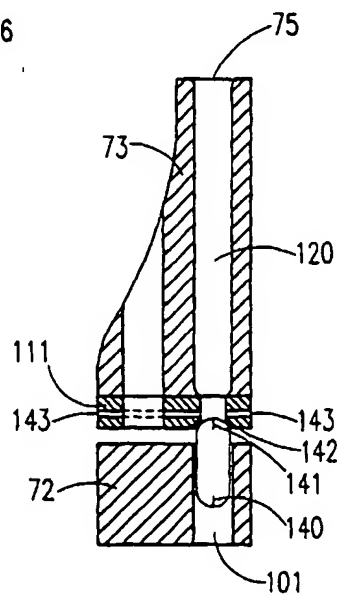


FIG. 8

BEST AVAILABLE COPY